

PREMIUM FLOORS

BRING YOUR SPACE TO LIFE

Paradise Collection

LVP 5mm



Office: 587-315-3396



info@premiumfloors.ca



Unit 1, 9840 47 Ave NW,
Edmonton, AB T6E 5M7



premiumfloors.ca

Product Specification

Style	Paradise Collection
Construction	LVP LooseLay
Embossing	BP Surface
Planks per box	8
Width and Length	7.25"x48"
Total Thickness	5mm
Underlayment	No
Wear Layer	20mil (0.5mm)
Sqft per box	19.33
Certification	YES
Click	No

Brown Sugar SV5011

Palermo SV5012

Woodland SV5013

Canyon SV5014

Certificate



Style Information

Total Thickness (mm)	5mm
Core Thickness (mm)	5mm
Underlayment	No
Wear Layer (mm)	20mil (0.5mm)
Coating	UV Coating
Fiberglass	No
Bevel Finish	Micro Bevel

Pack Information

Plank Size	7.25"x48"
Plank per box	8
Sqft per Box	19.33
Weight	20 kg
Boxes per Skid	50 boxes



SUBFLOOR PREPARATION

GENERAL SUBFLOOR PREPARATION & PRECAUTIONS

Subfloors must be clean and free of dirt and debris prior to installation.

Subfloors must be structurally sound and flat prior to installation.

Carpet is not a suitable underlayment for Vinyl floors. All carpet, carpet pad and carpet tack should be removed prior to installation.

Variations in the subfloor flatness should not exceed 1/16" per 3 ft. (2 mm/m).

Floors must be leveled to meet this specification prior to installation. Level by filling depressed areas with floor leveling compounds and sanding or grinding down any raised areas. Subfloor thickness must be a minimum of 15 mm (5/8").

Vinyl flooring is waterproof. It is not a water-proofer, any moisture problems need to be addressed prior to installation.

CONCRETE

Concrete subfloors must be properly cured and allowed to dry for at least 60 days prior to installation.

Test concrete subfloor for moisture prior to installation.

If condensation appears on the film after 24 hours or concrete appears dark, in color, moisture is likely present and a Calcium Chloride test must be performed.

The maximum allowable moisture emission is 5 lbs./1000 ft.² per 24 hours (2.26 kg/101.6 m² per 24 hours).

WOOD

Wood subfloors must be structurally sound and screwed or nailed to supporting beams.

ROOM PREPARATION

WALL BASE/TRIM

Removal of existing wall base/trim is optional.

Wall base or trim will need to be installed once the flooring installation is complete to cover the expansion space around the perimeter of the room. Always nail/adhere wall base and trim to the wall. Never nail/adhere it to vinyl flooring.

DOORS/DOOR JAMBS

Click Vinyl floors should be installed under door jambs so your door jambs will need to be undercut accordingly. To do so:

Use Click Vinyl flooring off-cut and a small piece of underlayment to support your saw blade at the correct height for undercutting.

Check door clearances and make any necessary height adjustments before installing floors.

Make sure to leave the correct expansion spacing.

WALL IRREGULARITIES

Walls are not always perfectly straight. Click Vinyl floors will need to be cut so as to fit within irregularities of your walls. To do so:

1. Install a complete, first row of the Click Vinyl floor and ensure that all long edges of the flooring are aligned flush with one other.
2. Slide the whole row against the wall; you will now notice any of these irregularities (i.e. areas where the wall is not straight.)
3. Trace the contour of the wall onto the row of Click Vinyl flooring with a pencil or marker.
4. Once traced, uninstall the planks carefully so as to not damage the locking system and cut along the traced line.
5. Re-install the planks leaving the necessary 3/8" (10 mm) expansion space.

INSTALLATION INSTRUCTIONS

BASIC PROCEDURES


Acclimate the boxes in the installation environment for 48 hours. The recommended temperature range is between 65-85 °F.

Inspect every plank for damage before installing it.

Prepare the tools. You will need: Measuring tape, Chalk line, Notched trowel, Vinyl cutter or utility knife, Hand roller or soft mallet, 100-pound roller, Fine-toothed saw, Spacers, Level, Knee pads.

Equipped with these tools and a bit of ingenuity for improvising when needed, you'll be set to tackle your glue down vinyl plank flooring project with confidence.

First things first, your subfloor needs to be in tip-top shape. Imagine you're laying the foundation for a house; it needs to be solid and level. For concrete floors, sweep and mop to get rid of any dust and debris. Check for moisture, too, by laying down a plastic sheet for 24 hours, and if you find condensation, you'll need to sort that out before laying any vinyl. For wooden floors, ensure everything's nailed down tight. No squeaks or bumps allowed. Use a leveling compound if you find any dips or peaks.

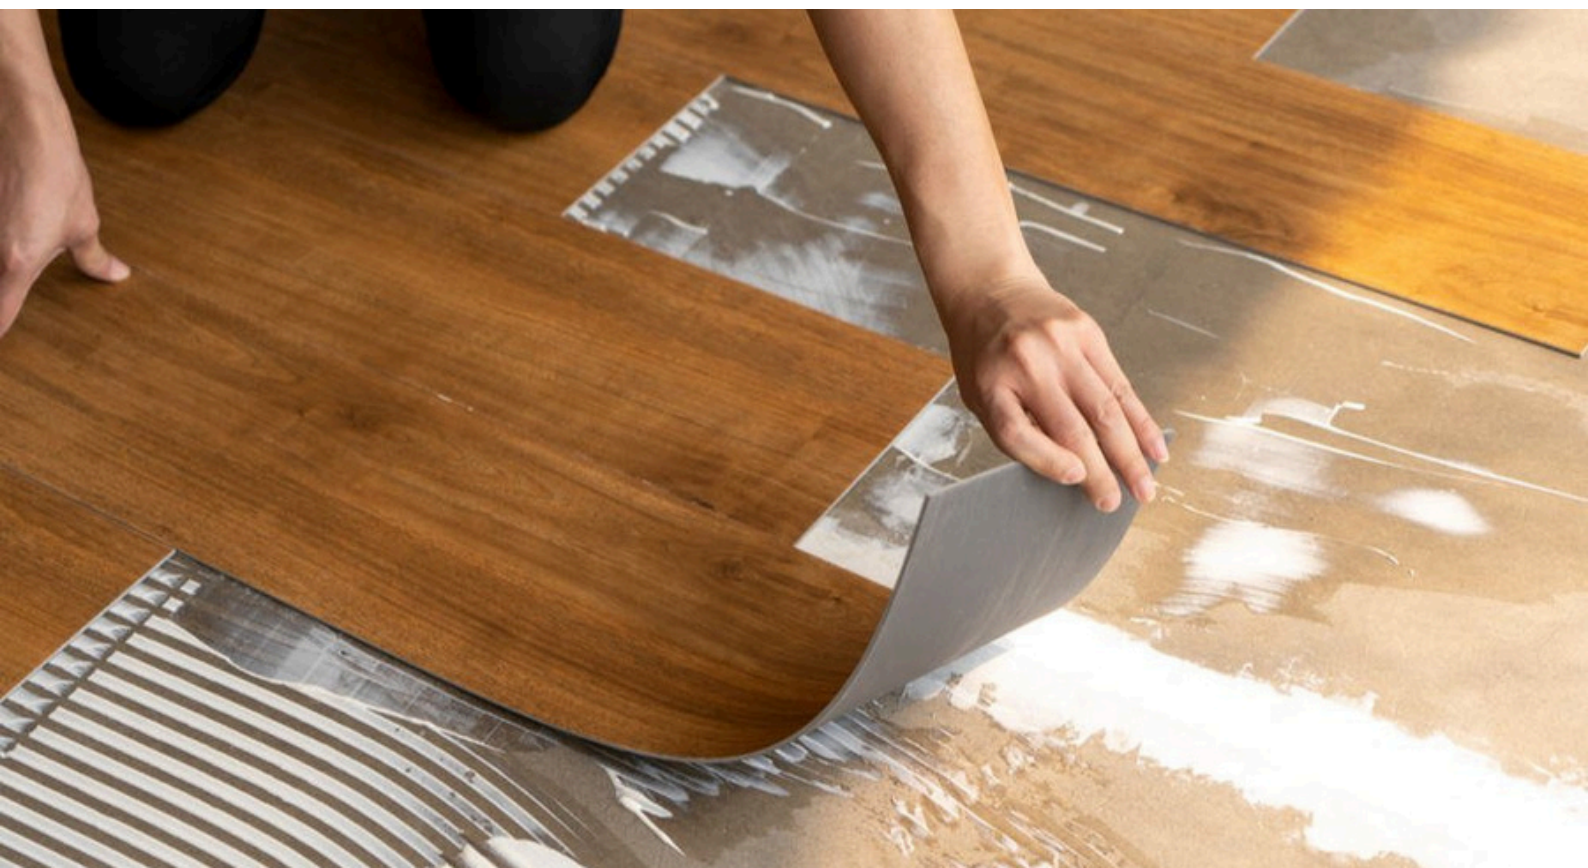

INSTRUCTION


- First, select an adhesive pattern appropriate to both the size of the project and the level of foot traffic to be expected.
- Next, you'll need to determine the placement of the guideline for the starting row, taking into consideration the width of the edge rows. Setting up a flooring guideline for your starting row will be important for a successful installation.
- Determine the placement of your guideline taking into consideration the width of your edge rows.
- The edge rows are the first and last rows closest to the starting wall. They account for wall deviation and must not be shorter than 3" on both sides.
- Once the guideline is determined, set the starting row using a chalk-line reel.
- Once you complete the first 3 steps, you're now ready to begin installing your GlueDown flooring. For the adhesive pattern, use a trowel and spread the adhesive evenly at a 45-degree angle. After spreading the adhesive, wait 45-90 minutes until there's a tacky touch and a change in color.
- Next, begin your starting row by laying your first plank against the wall along the guideline. Following the guideline is essential to ensure the installation remains square to the room.
- To finish the starting row, the last plank will likely need to be cut to size. Using a pencil, mark the plank at the appropriate length. Then score the top of the plank twice with a utility knife using a carpenter's square to ensure a straight cut, then cut once more for a clean separation. If available, a guillotine may also be used for a quick precision cut. Repeat this process until you meet your edge row.
- For the edge row, determine the appropriate width and then modify the planks accordingly. To do this, lay the planks for your edge row on top of the starting row, trace a line across these planks by butting a loose piece of flooring up against the wall, and cut. Install the planks for the edge row against the wall, making sure they are nice and snug, leaving no expansion gaps.
- Upon completing the installation, use a 75-100lb roller to secure the flooring, and clean your surface. You've just successfully finished your installation of the GlueDown flooring.

MAINTENANCE INSTRUCTIONS

- Furniture with castors or wheels must be easy swiveling, large surface non-staining and suitable for resilient floors.
- Use walk off mats at entrances to prevent dirt and grit from being tracked onto the floor.
- Sweep or vacuum the floor regularly to remove loose dirt. Avoid using a vacuum with a beater bar.
- Clean up spills immediately.
- Damp mop as needed using clean water and a diluted floor cleaner. Do not use harsh cleaners or chemicals on the floor.
- Don't use paste wax or solvent-based polishes.

Don't clean vinyl floors with:

- Abrasive powders
- Black soap
- Acetone or solvents
- Wax or varnish
- Oil-based products
- Steam cleaners

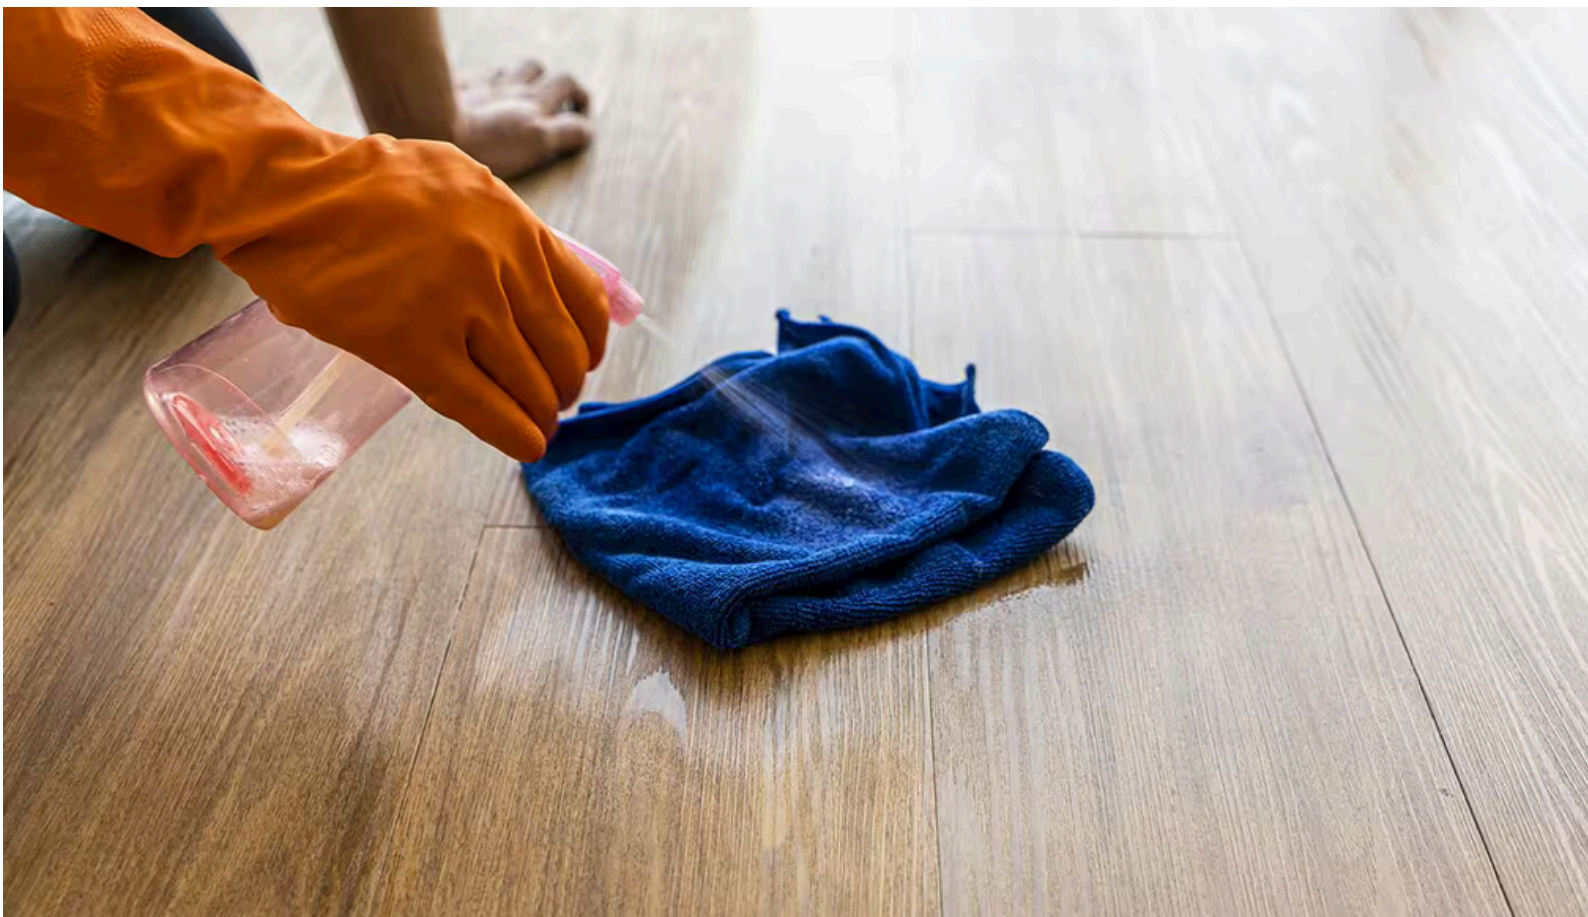

WARRANTY

IMPORTANT NOTICE

Buyers and owners are responsible for thoroughly reading all materials provided by the retailer at time of purchase prior to the installation of flooring, including the installation guidelines, maintenance instructions, and the product warranty information.

Premium Floors is not responsible for the installer's application of the product and requires the product to be inspected prior to installation. The installer should contact the supplier immediately for replacement if the product (whether an individual plank or more) appears doubtful in appearance, such as grade, color, finish, or quality. The supplier is responsible for replacing flooring materials in a timely fashion if the product is determined to be defective. However, Premium Floors is not responsible for flooring that has been previously installed or damaged on the surface (or tongue) of the plank by the installer.

LENGTH OF COVERAGE

This limited residential warranty is valid from the date of purchase of the flooring up to the number of years indicated on your invoice (25 years) and 12 years for light commercial foot traffic.

WHAT'S COVERED

Your Vinyl floor is warranted against finish wear from normal household conditions resulting wearing through the decorative finish and it will resist water damage under normal use conditions.